



DC-直流轴流风扇 40x40x15mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)


PWM




风扇单重: 20g (weight: 20g)



风扇P-Q曲线 / Fan performance curve

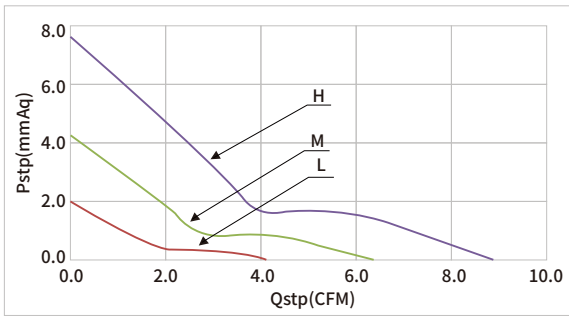

尺寸图 / DIMENSIONS DRAWING

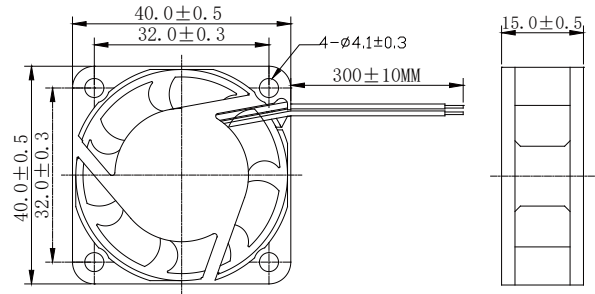

Model	Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow	Static Pressure	Noise				
型号	轴承	工作电压	启动电压	电流	功率	转速	风量	风压	噪音				
Part NO.	Function	System	VDC	VDC	A	W	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dBA	
HDS0405HD	Sleeve	5	4.0	4.0	0.29	1.45	8000	0.25	8.87	7.61	0.30	34.3	
HDS0405MD			4.0	4.0	0.21	1.05	6000	0.18	6.39	4.22	0.17	30.6	
HDS0405LD			4.0	4.0	0.12	0.60	4000	0.12	4.12	1.97	0.08	21.8	
HDB0405HD			Ball	4.0	4.0	0.29	1.45	8000	0.25	8.87	7.61	0.30	34.3
HDB0405MD				4.0	4.0	0.21	1.05	6000	0.18	6.39	4.22	0.17	30.6
HDB0405LD				4.0	4.0	0.12	0.60	4000	0.12	4.12	1.97	0.08	21.8
HDS0412HD	Sleeve	12	9.0	9.0	0.14	1.68	8000	0.25	8.87	7.61	0.30	34.3	
HDS0412MD			9.0	9.0	0.10	1.20	6000	0.18	6.39	4.22	0.17	30.6	
HDS0412LD			9.0	9.0	0.05	0.60	4000	0.12	4.12	1.97	0.08	21.8	
HDB0412HD			Ball	9.0	9.0	0.14	1.68	8000	0.25	8.87	7.61	0.30	34.3
HDB0412MD				9.0	9.0	0.10	1.20	6000	0.18	6.39	4.22	0.17	30.6
HDB0412LD				9.0	9.0	0.05	0.60	4000	0.12	4.12	1.97	0.08	21.8
HDS0424HD	Sleeve	24	12.0	12.0	0.10	2.40	8000	0.25	8.87	7.61	0.30	34.3	
HDS0424MD			12.0	12.0	0.08	1.92	6000	0.18	6.39	4.22	0.17	30.6	
HDS0424LD			12.0	12.0	0.04	0.96	4000	0.12	4.12	1.97	0.08	21.8	
HDB0424HD			Ball	12.0	12.0	0.10	2.40	8000	0.25	8.87	7.61	0.30	34.3
HDB0424MD				12.0	12.0	0.08	1.92	6000	0.18	6.39	4.22	0.17	30.6
HDB0424LD				12.0	12.0	0.04	0.96	4000	0.12	4.12	1.97	0.08	21.8