



## DC-鼓风机风扇 60x60x25mm

### 马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD


3. 调速方式 (Speed control mode)

PWM




风扇单重: 45g (weight: 45g)

### 风扇P-Q曲线 / Fan performance curve

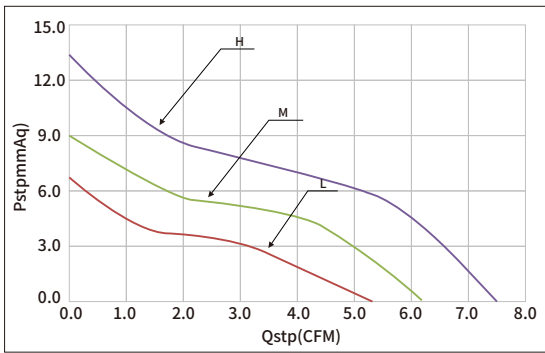

### 尺寸图 / DIMENSIONS DRAWING

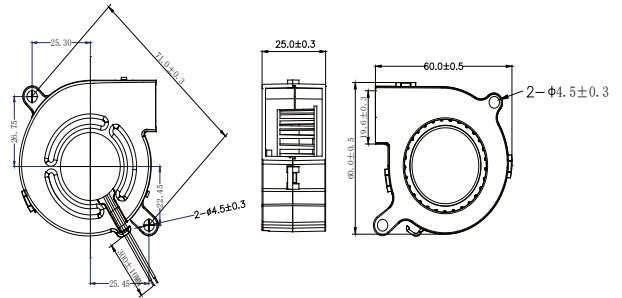

Model	Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow	Static Pressure	Noise				
型号	轴承	工作电压	启动电压	电流	功率	转速	风量	风压	噪音				
Part NO.	Function	System	VDC	VDC	A	W	RPM	M <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	INH <sub>2</sub> O	dBA	
HBS0612HA	Sleeve	12	5.0	5.0	0.32	3.84	4500	0.21	7.56	13.40	0.53	41.3	
HBS0612MA			5.0	0.24	2.88	3700	0.18	6.22	9.06	0.36	37.1		
HBS0612LA			5.0	0.18	2.16	3200	0.15	5.38	6.78	0.27	33.9		
HBB0612HA			Ball	5.0	5.0	0.32	3.84	4500	0.21	7.56	13.40	0.53	41.3
HBB0612MA				5.0	0.24	2.88	3700	0.18	6.22	9.06	0.36	37.1	
HBB0612LA				5.0	0.18	2.16	3200	0.15	5.38	6.78	0.27	33.9	
HBS0624HA	Sleeve	24	12.0	12.0	0.20	4.80	4500	0.21	7.56	13.40	0.53	41.3	
HBS0624MA			12.0	0.15	3.60	3700	0.18	6.22	9.06	0.36	37.1		
HBS0624LA			12.0	0.11	2.64	3200	0.15	5.38	6.78	0.27	33.9		
HBB0624HA			Ball	12.0	12.0	0.20	4.80	4500	0.21	7.56	13.40	0.53	41.3
HBB0624MA				12.0	0.15	3.60	3700	0.18	6.22	9.06	0.36	37.1	
HBB0624LA				12.0	0.11	2.64	3200	0.15	5.38	6.78	0.27	33.9	